

SPECIFICATION



UNIVERSAL FAST CHARGER

Weight: 126 lb (57 kg) Charges within 2.5 hours*. Compatible with 48V - 96V machines.

*Based on 19C-1E mini excavators. Charge time varies per machine.



100% Efficient.

The JCB universal fast charging unit can charge machines within 2.5 hours* and is ideal for customers with demanding workloads and the need for quicker charging turnaround times.

100% Compatible.

Compatible with all JCB's 100% electric, zero emissions E-TECH range of machines except the HTD-5E dumpster and TLT66-40E Teletruk, eliminating the need for numerous charging solutions.

100% Convenient.

A portable, free-standing unit with built in lifting eye for easy maneuverability between sites. An IP54 rated enclosure and optional storage and travel cover make it suitable for outdoors.

Compatible machines.




*Based on I9C-1E mini excavators. Charge time varies per machine.



SPECIFICATION

UNIVERSAL FAST CHARGER

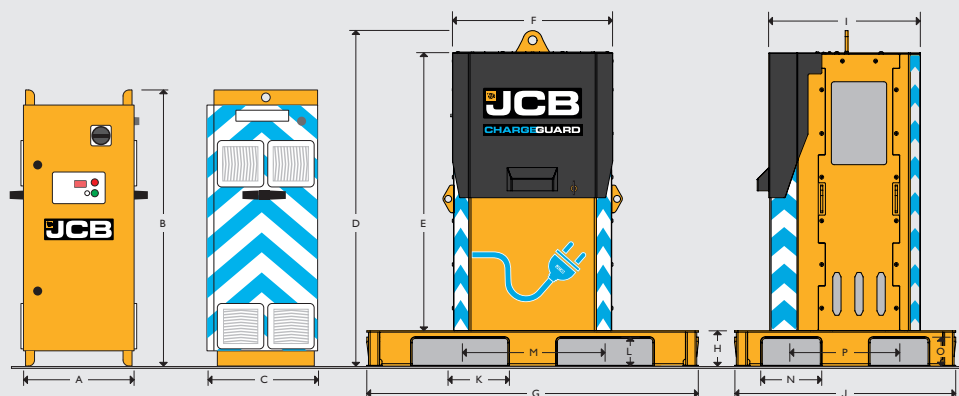

STATIC DIMENSIONS – UNIVERSAL FAST CHARGER

A	Width	in (mm)	16 (406)
B	Height	in (mm)	34.5 (875)
C	Depth	in (mm)	15.8 (401)

STATIC DIMENSIONS – CHARGE GUARD AND BASE (OPTIONAL)

D	Full height	in (mm)	47.8 (1214)
E	Height	in (mm)	39.5 (1001)
F	Width	in (mm)	22.5 (572)
G	Full width	in (mm)	47.2 (1200)
H	Height of base	in (mm)	(5 (128)
I	Depth	in (mm)	21.6 (549)
J	Full depth	in (mm)	31.5 (800)
K	Front fork pocket width	in (mm)	13.7 (350)
L	Front fork pocket height	in (mm)	3.8 (97)
M	Front fork pocket centres	in (mm)	20.5 (520)
N	Side fork pocket width	in (mm)	8.5 (215)
O	Side fork pocket height	in (mm)	3.8 (97)
P	Side fork pocket centres	in (mm)	15 (385)

FEATURES - UNIVERSAL FAST CHARGER

- Lithium-ion ready
- 3 phase power supply
- 2 year warranty
- Lifting hook and handles for maneuverability
- Supplied with an 8 ft (2.4 m) charge cable which plugs directly into the machine

FEATURES - CHARGE GUARD (OPTIONAL)

- Lockable for enhanced security
- Lifting hook and fork pockets for maneuverability



SPECIFICATION

Weight - Universal fast charger	lb (kg)	126 (57)
Weight - Charge guard (optional)	lb (kg)	317 (144)
Customer Supply Input required		3 Phase, 22A @ 480V

MACHINE CHARGING TIMES WITH FAST CHARGER 0-100%

505-20E compact telehandler	1 60A @ 480V	1 hour 50 minutes
19C-1E mini excavator	1 60A @ 480V	2 hours 30 minutes
ITE site dumper	1 60A @ 480V	1 hour 40 minutes



Universal fast charger

Weight: 126 lb (57 kg) Charges within 2.5 hours*. Compatible with 48V - 96V machines.

*Based on 19C-1E mini excavators. Charge time varies per machine.

Your nearest JCB Dealer

JCB North American – Headquarters

2000 Bamford Blvd., Savannah, Georgia, 31322 Tel: (912) 447-2000

Download the very latest information on this product range at www.jcb.com

JCB inc. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any other means, electronic, mechanical, photocopying or otherwise, without prior permission from JCB inc. All references in this publication to operating weights, sizes, capacities and other performance measurements are provided for guidance only and may vary dependant upon the exact specification of machine. They should not therefore be relied upon in relation to suitability for a particular application. Guidance and advice should always be sought from your JCB Dealer. JCB reserves the right to change specifications without notice. Illustrations and specifications shown may include optional equipment and accessories. The JCB logo is a registered trademark of J C Bamford Excavators Ltd.